



# 慈溪市万捷电子有限公司

## CIXI WANJIE ELECTRONIC CO., LTD

### REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE



### UL/CUL 技术参数

UL/CUL Technical Data	Use Group	B	C	D
额定电压 Rated Voltage	[V]	300	-	300
额定电流 Rated Current	[A]	10	-	10

接线范围 Wire Range	单/多芯线 Solid/Stranded	[AWG]	28-12
耐电压 Withstanding Voltage	1600V/1Min		





### IEC 技术参数

IEC Technical Data	Overvoltage Category	III	III	II
过电压类别 Overvoltage Category	III	III	II	II
污染等级 Contamination Class	3	2	2	2
额定电压 Rated Voltage	[V]	250	320	630
额定电流 Rated Current	[A]	12	12	12

额定冲击电压 Impulse withstand voltage	[kV]	4.0	4.0	4.0
导线截面 Conductor cross section	硬质/柔性导线 Solid/flexible	[mm <sup>2</sup> ]	0.2-2.5	

材料 Material	绝缘材料 Insulation Material	P466
阻燃等级 Inflammability	UL94V-0	
导体材料 Conductor Material	铜合金 Copper alloy	
导体表面涂层 Conductive Coating	镀锡 Sn Plated	

一般参数 Other Data	间距 Pitch / 极数 Poles	[mm] / [P]	5.08 / (02-24)
剥线长度 Stripping Length	[mm]	8-9	
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-	
工作温度 Operating temperature	[°C]	40-105	
焊接温度 Operating temperature	[mm]	-	
引脚/尺寸 Pin Dimensions	[mm]	-	
PCB板孔径 PCB Hole Diameter	[mm]	-	

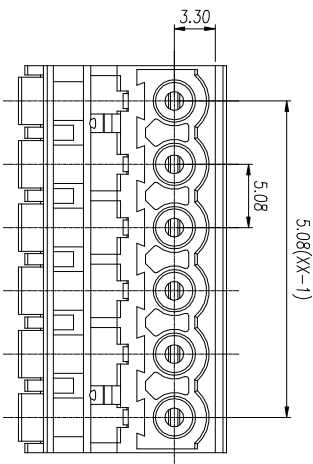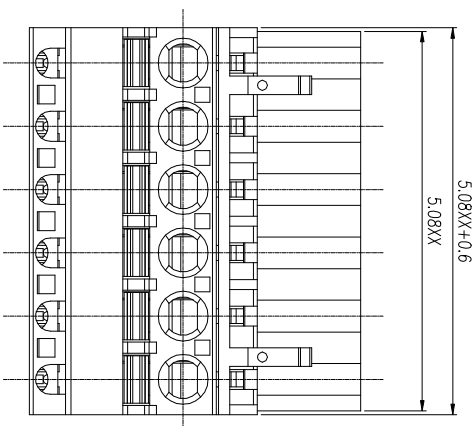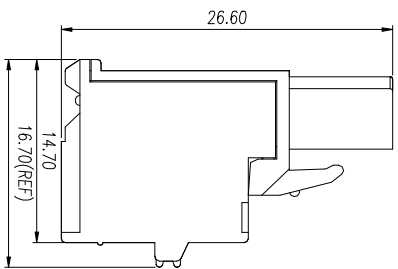

linear dimension(Tolerances Standard GB/T 14486-2008)

tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
variable range	6 to 10	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to 100	10 to 10	10 to 100	100 to 100

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 1:5.1

第二视图/THIRD ANGLE PROJECTION 版本 / REV V0



慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD

名称 / TITLE WJZEDGKA-5.08-XXP-1YY-00A